

1.3/1.55 Splitter/Combiner WDM-15

The 3 port splitter/combiner is 3 port filter module based on the cutting-edge thin film filter technology which divides 1.3 μ m band and 1.55 μ m band with low insertion loss and high isolation as well as long term stability and reliability.


Features

- ▶ Low loss, low PDL
- ▶ High channel isolation
- ▶ High reliability (Telcordia GR-1221 qualified)
- ▶ Compact size for system integration

Applications

- ▶ CATV, Access Networks
- ▶ CWDM, Band split

Dimensions

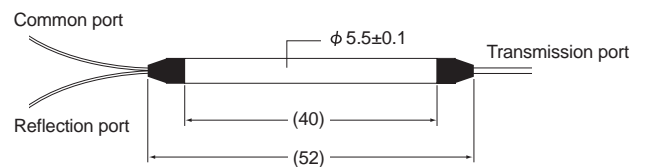

Unit: mm

■ Typical Performance

Parameter	Units		
Thermal Stability (Wavelength)	Typ.	nm/°C	0.005
Directivity	Min.	dB	45
Return Loss	Min.	dB	50
Polarization Dependent Loss (PDL)	Max.	dB	0.1
Polarization Mode Dispersion (PMD)	Max.	ps	0.1
Optical Power	Max.	dBm	23
Operating Temperature	-	°C	-5 to +70
Storage Temperature	-	°C	-40 to +85

■ Filter Specifications

Parameter	Units		
1.3µm Pass Band (-0.5dB Bandwidth)	-	nm	1260-1360
1.55µm Pass Band (-0.5dB Bandwidth)	-	nm	1460-1610
Flatness	Max.	dB	0.3
Insertion Loss	Max.	dB	0.8
Adjacent Channel Isolation	Min.	dB	40
Insertion Loss of Reflect Channels	Max.	dB	0.5
Reflect Channel Isolation	Min.	dB	15 (Typ. 18)

- *1 All parameters are specified over operating temperature range.
- *2 Insertion loss per filter includes Ripple and PDL, without connectors.
- *3 Please contact santec to discuss specific performance requirements.

■ Ordering Code

WDM-15 - A - B - C - D / E

A=Channel
1=1ch

B=Type
1315=1.3/1.55 Split Filter

C=Fiber Length
10=1.0m, 20=2.0m

D=Connector
00=No Connector, FS=FC-SPC, FA=FC-APC, SS=SC-SPC, SA=SC-APC
MU=MU-SPC, MJ=MUJ-SPC, LC=LC-SPC

E=Center Wavelength
(ex) 1310nm Pass --->1310
1510nm Pass --->1550

www.santec.com E-Mail : sales@santec.com

2005 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notices.

July 22, 2005



SANTEC CORPORATION
5823 Ohkusa-Nenjoyozaka, Komaki 485-0802, Japan Tel. +81-568-79-1959 Fax +81-568-79-1718

SANTEC U.S.A. CORPORATION
433 Hackensack Ave., Hackensack, NJ, 07601, U.S.A. Toll Free +1-800-726-8321 (santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

SANTEC EUROPE LIMITED
Magdalen Centre, Robert Robinson Ave., The Oxford Science Park, Oxford OX4 4GA, U.K. Tel. +44-1865-784960 Fax +44-1865-784961

SANTEC (SHANGHAI) CORPORATION, LIMITED
C, 11/F Hangke Tower, No.92 Yuanshen RD Pudong Shanghai 200120 China. Tel: +86-21-58828060, +86-21-58828061 Fax: +86-21-58828062